




115gsm Poly Airmesh

Description: 100% Polyester with vent holes

Features:

- 54% Air-Flow System
- Ideal for flags, beach flags, barrier jackets and similar
- Suitable for indoor and outdoor applications such as sporting and public events
- FR Certification

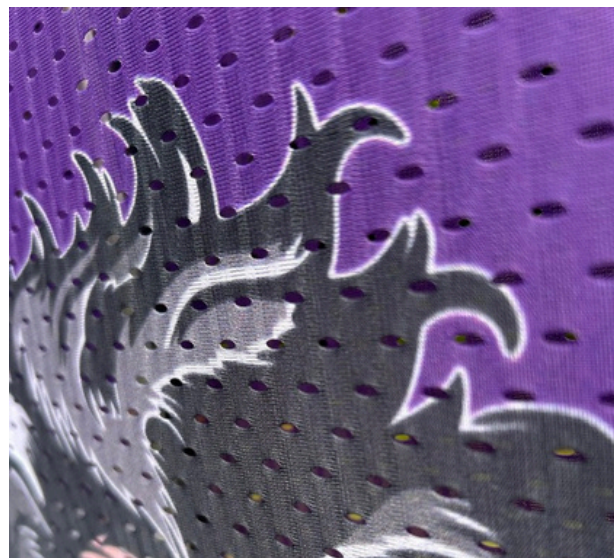

Material Details

Properties	Test Method	Metric
FIBRE TYPE	DIN 60001	100% Polyester
MASS	DIN EN ISO 2286-2	115gsm
CONSTRUCTION		Warp Knitted, 3-bar
BREAKING LOAD	EN ISO 1421	Warp 426N Weft 2069N
TEAR STRENGTH	DIN 53363	Warp 95N Weft 61N
FLAME RESISTANCE	DIN 4102 BS 5867	B1 Type B

NOTE: This technical data sheet is not legal binding and is based on average results from current production. Unless otherwise stated, values cannot be considered as minimum to be satisfied. Purchaser is fully responsible for determining the product suitability for its intended application. Technical details are subject to change without prior notice, so please contact our technical service for any additional information you may require.

Technical data corresponds with our latest knowledge and is offered without liability

Newton Press Ltd Trading as Newton Mesh

Registered Office: Units 7-8 Cloverfield Industrial Estate, Lopham Road, East Harling, Norfolk NR16
2LT Directors: N.P.Ward, C.M.Ward, C.A.Ward, S.L.Ward
Co. Reg No. 03066749 | VAT Reg. No. 637 1433 47